




Economic manual or electrically operated Edge loading ramp.

- A loading ramp specifically designed for operators of standard vehicle fleets with the same height, operated manually or electrically.
- Available in hydraulic (E) or manual (M) versions.
- The DTC-M version includes a hydraulic hand pump, while the DTC-E version has a hydraulic power unit.
- At the same time, it meets the demands of most loading operations and all ergonomic requirements.
- Its two-piece lip provides ease of maintenance and use.

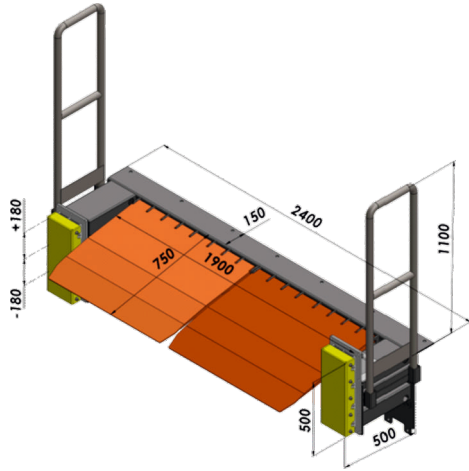

Loading Capacity	7, 9 tons
Platform Features	
Platform - Teardrop Pattern Thickness	6/7 mm, 9/10 mm, 12/13 mm
Platform - Patterned Sheet Material	st37-2 - S235JR
Vertical Flap Features	
Vertical Flap - Teardrop Pattern Thickness	12/13 mm, 15/16 mm, 22/23 mm
Vertical Flap - Patterned Sheet Material	st52-3 - S275JR
Vertical Flap - Length	750 mm
Control Unit Protection Class	IP 65
Hydraulic Oil Temperature Range	-20 °C / +40 °C
Magnetic Valves	24 VDC
Motor Power	400 V - 3 Phase 0,75 Kw
Standards	European Standard EN 1398 American ANSI+30.1

OPTIONS

