

Standard




Optional



Economical Manual or Electric Mini Edge Loading Ramp

- Designed for operators of fleets with uniform bed heights, this loading ramp operates manually or electrically.
- Available in hydraulic (E) or manual (M) versions.
- Gas spring mechanism included; SAURUS Edge-E features a hydraulic power unit.
- Meets most loading demands and all ergonomic requirements.
- Two-part lip design ensures easy maintenance and use.

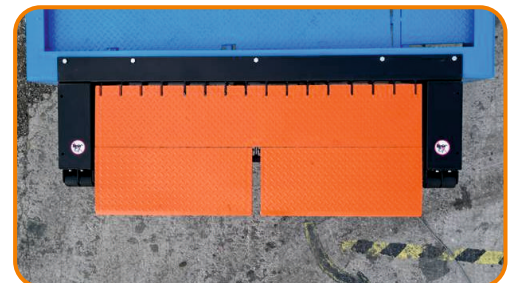

Nominal Uzunluk	770 mm
Nominal Genişlik	1750, 1900, 2000 mm
Yükleme Kapasitesi	7, 9 tons
Dikey Çalışma Aralığı	
Dock'un Üstüne Yükselmek	150mm yukarı kadar
Dock'un Altına Düşmek	150mm aşağı kadar
Platform Özellikleri	
Platform - Damla Desen Kalınlığı	6/7mm, 9/10mm
Platform - Damla Desenli Sac Malzemesi	st37-2- S235JR
Köşe Rampa - Damla Desen Kalınlığı	12/13mm, 15/16 mm, 22/23mm
Köşe Rampa - Damla Desenli Sac Malzemesi	st52-3 - S275JR
Köşe Rampa - Uzunluk	400 mm
Kontrol Ünitesi Koruma Sınıfı	IP 65
Hidrolik Yağ Sıcaklık Aralığı	-20 °C / +40 °C
Manyetik Vanalar	24 VDC
Motor Gücü	400 V - 3 Phase 0,75 Kw
Standart	European Standard EN 1398 American ANSI+30.1

OPTIONS

Electro Hydraulic



Galvanized Steel Wedge Cover



Security Barrier

