


SAURUS Hinged Loading Ramp Features

Preventive Maintenance: Easy and quick to perform, ensuring functionality and preventing downtime.



Curved Hinged Lip: Prevents grounding of material handling equipment.

Open Hinged with Hinged Lip: Prevents outward swinging motion, requires no cleaning, and is easy to maintain.

Burnished Plate Support for Hinged Lip: Highly robust, absorbs all impact forces, provides protection against damage, and ensures longevity.

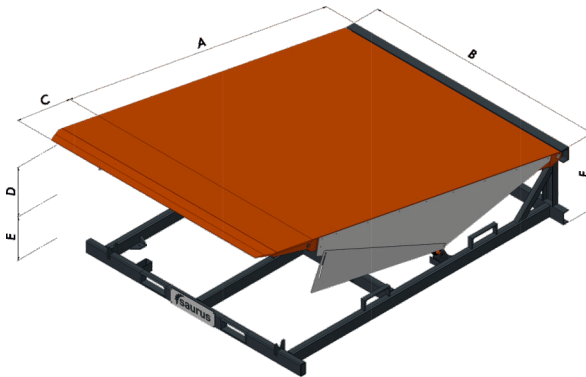

A	Nominal Length	2000, 2250, 2500, 2750, 3000, 4000 mm
B	Nominal Width	1750, 1900, 2000, 2200, 2350 mm
C	Hinged Flap Length	490 - 750 mm
D	Rise Above the Dock	up to 520 mm
E	Drop Below the Dock	down to 350 mm
F	Nominal Height	600, 700, 800, 900 mm
Loading Capacity		7, 9, 11, 15, 19 tons
Platform Features		
Platform - Teardrop Pattern Thickness		6/7 mm, 9/10 mm, 12/13 mm
Platform - Patterned Sheet Material		st37-2 - S235JR
Hinged Lip Features		
Hinged Lip - Teardrop Pattern Thickness		12/13 mm, 15/16 mm, 22/23 mm
Hinged Ramp - Patterned Sheet Material		st52-3 - S275JR
Hinged Lip - Length		490 , 750 mm
Control Unit Protection Class		IP 54
Hydraulic Oil Temperature Range		-20 °C / +40 °C
Magnetic Valves		24 VDC
Motor Power		400 V - 3 Phase 0,75 Kw
Standards		European Standard EN 1398 American ANSI+30.1

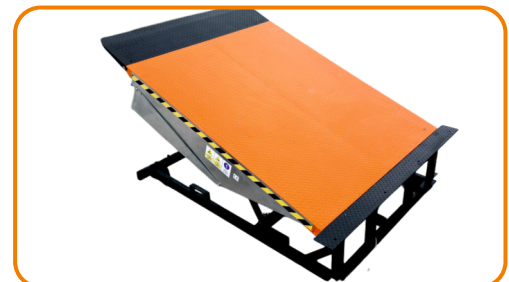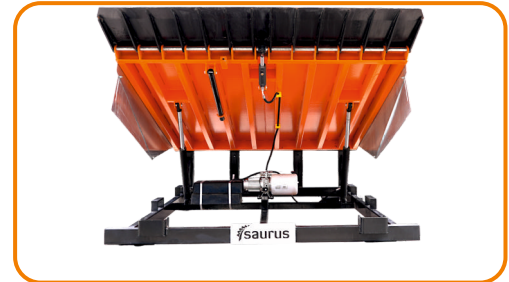

OPTIONS

